


## Technical Data Bimetal Temperature Automatic Reset Type 12EP



*example of use*

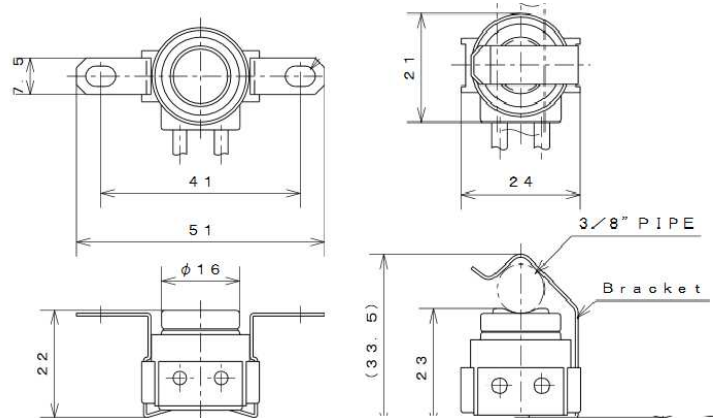

### version

### 12EP

contact version

automatic disconnection and connection of a circuit within the defined control range (temperature control)

contact type

NC = normally closed / NO = normally open

housing material

Phenol

nominal switching temperature

0°C until 70°C

max. ambient temperature

24h at 70°C and 24h at -30°C  
(according to internal test setup)

standard-tolerance range

±3K to ±4K

standard reset temperature

10K (tolerance ±4K to ±5K) below NST

rated voltage

125 VAC

rated current at  $U_N$  ohmic  $\cos \varphi = 1,0$

100mA / 125 VAC for 10.000 cycles  
(recommended minimum current = 1mA)

approvals

without

Connection

wire

and mounting

see on page 3

high voltage insulation

2 kV for 1 second

degree of protection

equivalent to IP67

contact resistance

<10mΩ

The indicated pictures, drawings and dates are exemplary. Depending on the switch configuration it may differ. Thermostats are safety components! For the use in a specific application technical guidelines, requirements or approvals must be considered and the thermostats must be tested in real environmental conditions. Please consider also the electrical power in relation with the voltage supply of your application. The approvals also differ depending on the various nominal voltage. We will be glad to help you, please ask.

## Bimetal Temperature Automatic Reset Type 12EP

### Functions & Types

#### Bimetal switch as a Automatic Reset Type

After reaching its factory-adjusted **Nominal Switching Temperature (NST)** the bimetal disc suddenly turns over from its stable initial position into a stable end position and thereby activates the switching device. The electrical circuit is disconnected (NC-type) or connected (NO-type). The bimetal disc turns back automatically in its initial position to close or open the circuit again.

#### Normally closed (NC)

At rising temperature contacts **open** and disconnect the electric circuit. (Interruption of the signalling pathway at temporary overheating, for example temperature control of a switch cabinet)


#### Normally open (NO)

At rising temperature contacts **close** and activate the electric circuit. (Connection of a signal transmitter or an air cooler)

Mounting options see on page 3

### Important Information

An Automatic Reset Type is not developed for final shut down because of no permanent end switch. The listed specifications and information are based on tests and test series. They are of a standard nature and therefore deviations may occur in connection with specific applications. Please note that outside influences like moisture, gas formation, ultraviolet radiation, magnetic fields or vibrations can affect the function of the thermostat. Especially any influence of silicon must be avoided.


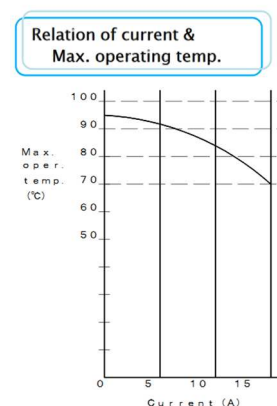


### Benefits & Advantages





The outstanding quality level of our Automatic Reset Type 12EP satisfies highest demands for safety and reliability. They are provided with a patented, fully developed and reliable switching device system.

Standard type	diameter 16,2mm (half-inch) and hole spacing 24,5mm
Save, reliable & durable	100% tests while production process / 100% final test if required
Temperature sensitive	mechanical unstressed and electrically unloaded bimetallic disk
Fast reaction	excellent heat transfer induced by an ideal placed bimetallic disk
Flexible use	various mountings are available as well as specific customer requests (see configuration card)


## Mountings:

	
<p>bracket 1 = hole size for M4 screw bracket 11 = hole size for M5 screw</p>	<p>pipe mounting 2 for 2/8 pipe pipe mounting 3 for 3/8 pipe pipe mounting 4 for 4/8 pipe pipe mounting 5 for 5/8 pipe</p>

## Caps:

			
<p><b>cap B</b> B = Ø 15,9 mm (stainless steel)</p>	<p><b>cap H and I</b> H = Ø 15,9 mm (steel); I = Ø 15,9 mm (cooper)</p>	<p><b>cap J</b> for pipe mounting 2/8 till 5/8 pipe clip</p>	<p><b>cap K</b> K = Ø 15,9 mm</p>

## Structure of the article number

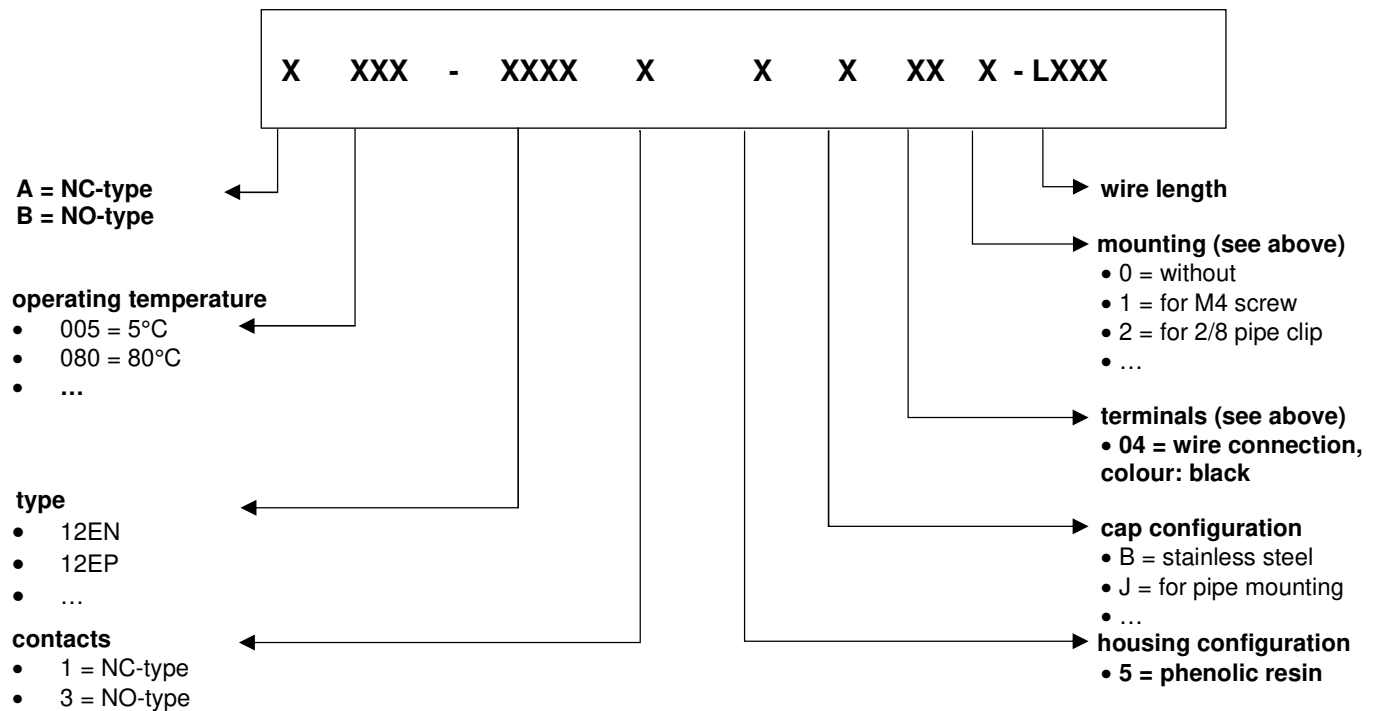

The manufacturing and production of our Thermostats is DIN ISO 9001 certified and of course the current RoHS-conformity is complied.

Our friendly team will give you detailed information of all our products. Of course, we want to help you, to find the best solution for your application. Please call us for further information.

Protherm Wärmeschutz GmbH  
Turnstraße 28  
D-75328 Schömburg

Phone: +49 (0) 7235 980 200  
Fax: +49 (0) 7235 980 201  
E-mail: [kontakt@protherm.info](mailto:kontakt@protherm.info)  
Internet: [www.protherm.info](http://www.protherm.info)